


Flexible-tube luminaire SPOT LED MCTFL 3 N

112462007-00091926

Waldmann **W**


ENGINEERS OF LIGHT



CEE 7/XVI

BS 1363

NEMA 1-15P

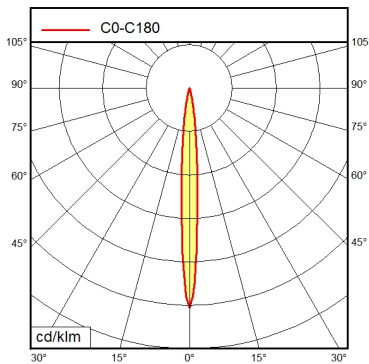

light source
work equipment
connected load
power consumption
luminous flux
luminous efficiency
light type/-color
colour temperatur
color rendering index
light distribution
system of protection
class of protection
technology
operation
housing
cover
arm
weight (net)
mains lead
fastening
accessory
maximum ambient temperature
special features

LED
electronic plug-in transformer
100 - 240 V; Wechselstrom (AC); 50 Hz; 60 Hz
ca. 7 W
approx. 400 lm
approx. 57 lm/W
daylight
approx. 5.400 K
CRI > 72
narrow-beam; direct
IP 20
II
switchable; no notice
rotary switch
aluminium; anodised; black
borosilicate
black
ca. 0,8 kg
ca. 2,7 m; mains plug; CEE 7/XVI; BS 1363; NEMA 1-15P
table clamp (accessory); wall bracket (accessory); screw-down flange; magnetic base (accessory)
Interchangeable mains plug
25 °C
Spot with a 10° angle of radiation