



CEE 7/VII

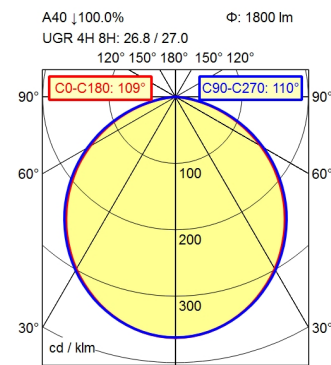

100 x 100 cm Φ : 1800 lm
 Em: 1015 lx
 Emax: 2005 lx
 Emin: 362 lx
 = 50 cm



Φ : 1800 lm
 E | 0°
 H | D

0.25 m	10442 lx	0.70 m 0.72 m
0.50 m	2611 lx	1.40 m 1.44 m
0.75 m	1160 lx	2.10 m 2.16 m
1.00 m	653 lx	2.80 m 2.87 m

- light source
- work equipment
- connected load
- secondary tension
- power consumption
- sec. power consumption
- luminous flux
- luminous efficiency
- light type/-color
- colour temperatur
- color rendering index
- light distribution
- direct ratio
- beam angle
- chromaticity tolerance LED
- luminance (L65)
- unified glare rating (4H 8H)
- system of protection
- class of protection
- technology
- operation
- housing
- cover
- arm
- balance of articulation joints
- weight (net)
- mains lead
- fastening
- decorative contrast side parts

- LED
- electronic transformer
- 100 - 240 V; Wechselstrom (AC); 50 Hz; 60 Hz
- 24 V
- ca. 38 W
- ca. 33 W
- approx. 2.000 lm
- approx. 60 lm/W
- D50 standard light; cold white
- approx. 5.000 K
- CRI > 95; R9 > 85
- direct
- approx. 100 %
- 110°
- < 3 SDCM
- <= 23000 cd/m²
- <= 28
- IP 20
- I with plug-in power supply; III without plug-in power supply
- Touch DIM
- multi-function switch
- aluminium coloured anodised
- milky; plastic
- silver metallic
- spring
- ca. 2,3 kg
- ca. 3,4 m; mains plug; CEE 7/VII
- table base
- black

