
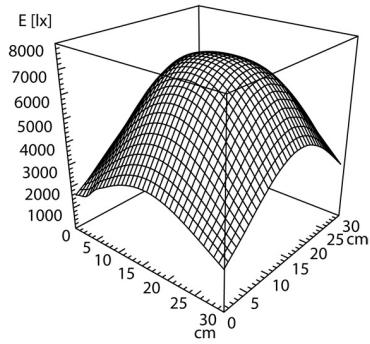


CEE 7/XVI

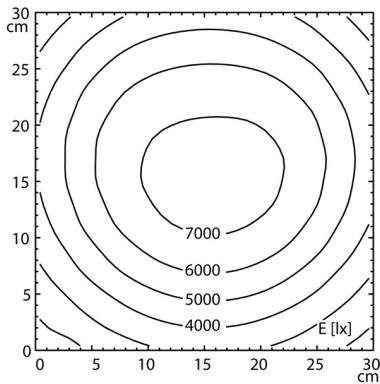

|                                       |   |
|---------------------------------------|---|
| <b>light source</b>                   | LED   |
| <b>work equipment</b>                 | electronic plug-in ballast  |
| <b>connected load</b>                 | 100 - 240 V; Wechselstrom (AC); 50 Hz; 60 Hz                            |
| <b>power consumption</b>              | ca. 11 W  |
| <b>sec. power consumption</b>         | ca. 9,5 W   |
| <b>luminous flux</b>                  | approx. 800 lm  |
| <b>luminous efficiency</b>            | approx. 72 lm/W   |
| <b>light type/-color</b>              | cold white  |
| <b>colour temperatur</b>              | approx. 5.000 K   |
| <b>color rendering index</b>          | CRI > 80  |
| <b>light distribution</b>             | direct  |
| <b>direct ratio</b>                   | approx. 100 %   |
| <b>chromaticity tolerance LED</b>     | < 3 SDCM  |
| <b>system of protection</b>           | IP 20   |
| <b>class of protection</b>            | II with plug-in power supply, III without plug-in power supply          |
| <b>technology</b>                     | continuously dimmable; Touch DIM  |
| <b>operation</b>                      | multi-function switch   |
| <b>housing</b>                        | plastic; untreated; dusty grey  |
| <b>cover</b>                          | Polycarbonate (PC)  |
| <b>arm</b>                            | tubular aluminium section; anodized; aluminium coloured anodised spring |
| <b>balance of articulation joints</b> | ca. 2,5 kg  |
| <b>weight (net)</b>                   | ca. 3,2 m; mains plug; CEE 7/XVI  |
| <b>mains lead</b>                     | tap16   |
| <b>fastening</b>                      | Ø 160 mm  |
| <b>lens, dimensions</b>               | PMMA  |
| <b>lens material</b>                  | 3,5   |
| <b>lens, diopters</b>                 | 25 °C   |
| <b>minimum ambient temperature</b>    | 25 °C   |
| <b>maximum ambient temperature</b>    | 25 °C   |