
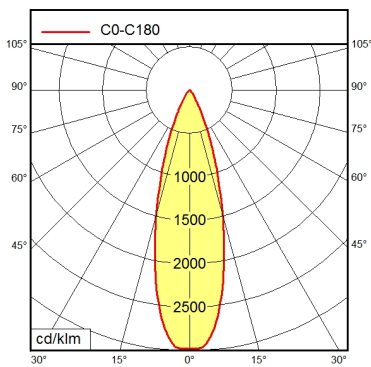


Flexible-tube luminaire SPOT LED MCTFL 3 S

112462003-00091960

Waldmann **W**

ENGINEERS OF LIGHT



light source	LED
work equipment	without
connected load	24 V; Wechselstrom (AC); Gleichstrom (DC)
power consumption	ca. 6 W
luminous flux	approx. 460 lm
luminous efficiency	approx. 76 lm/W
light type/-color	daylight
colour temperatur	approx. 5.400 K
color rendering index	CRI > 72
light distribution	wide beam; direct
system of protection	IP 65
class of protection	III
technology	switchable; no notice
operation	rotary switch
housing	aluminium; anodised; black
cover	borosilicate
arm	black
weight (net)	ca. 1,2 kg
mains lead	ca. 3 m; with free stranded wires
fastening	table clamp (accessory); wall bracket (accessory); screw-down flange; magnetic base (accessory)
maximum ambient temperature	25 °C
special features	Flood with 40° angle of radiation